

MANHOLE HOUSING GRAB

One grab for housing and cover !



The manhole housing grab enables simple and safe transport and laying of manhole covers according to EN 124 / DIN 1229.

The housings as well as the covers can be safely lifted and laid by the manhole housing grab.



The suspension eye of the manhole housing grab is fitted to the load hook of the excavator / loader and is then positioned onto the manhole cover. After releasing the safety catch the housing and the cover are lifted and positioned on the conical drain assembly.

When setting down the manhole cover the safety catch blocks itself and the grab opens automatically.


When turning the grab 180° the covers can be easily taken out of the housing using the grab and the hooks.

The manhole housing grab is galvanized as standard.

A patent has been issued for the manhole housing grab.

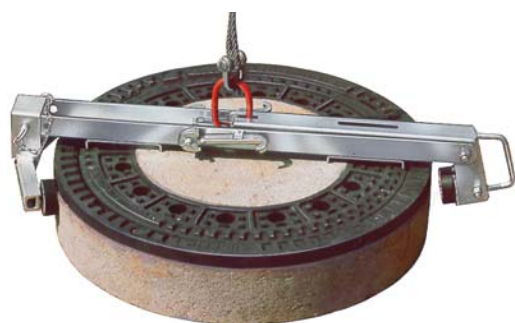

Hook A



Hook B

Order No.	Model	Carrying Capacity kg	Housing Diameter mm	Weight Approx. kg
137 010	RG-750	200	750 / 785	15
137 410	Hook A	100		0,25
137 420	Hook B	100		0,25