



GANTRY CRANE

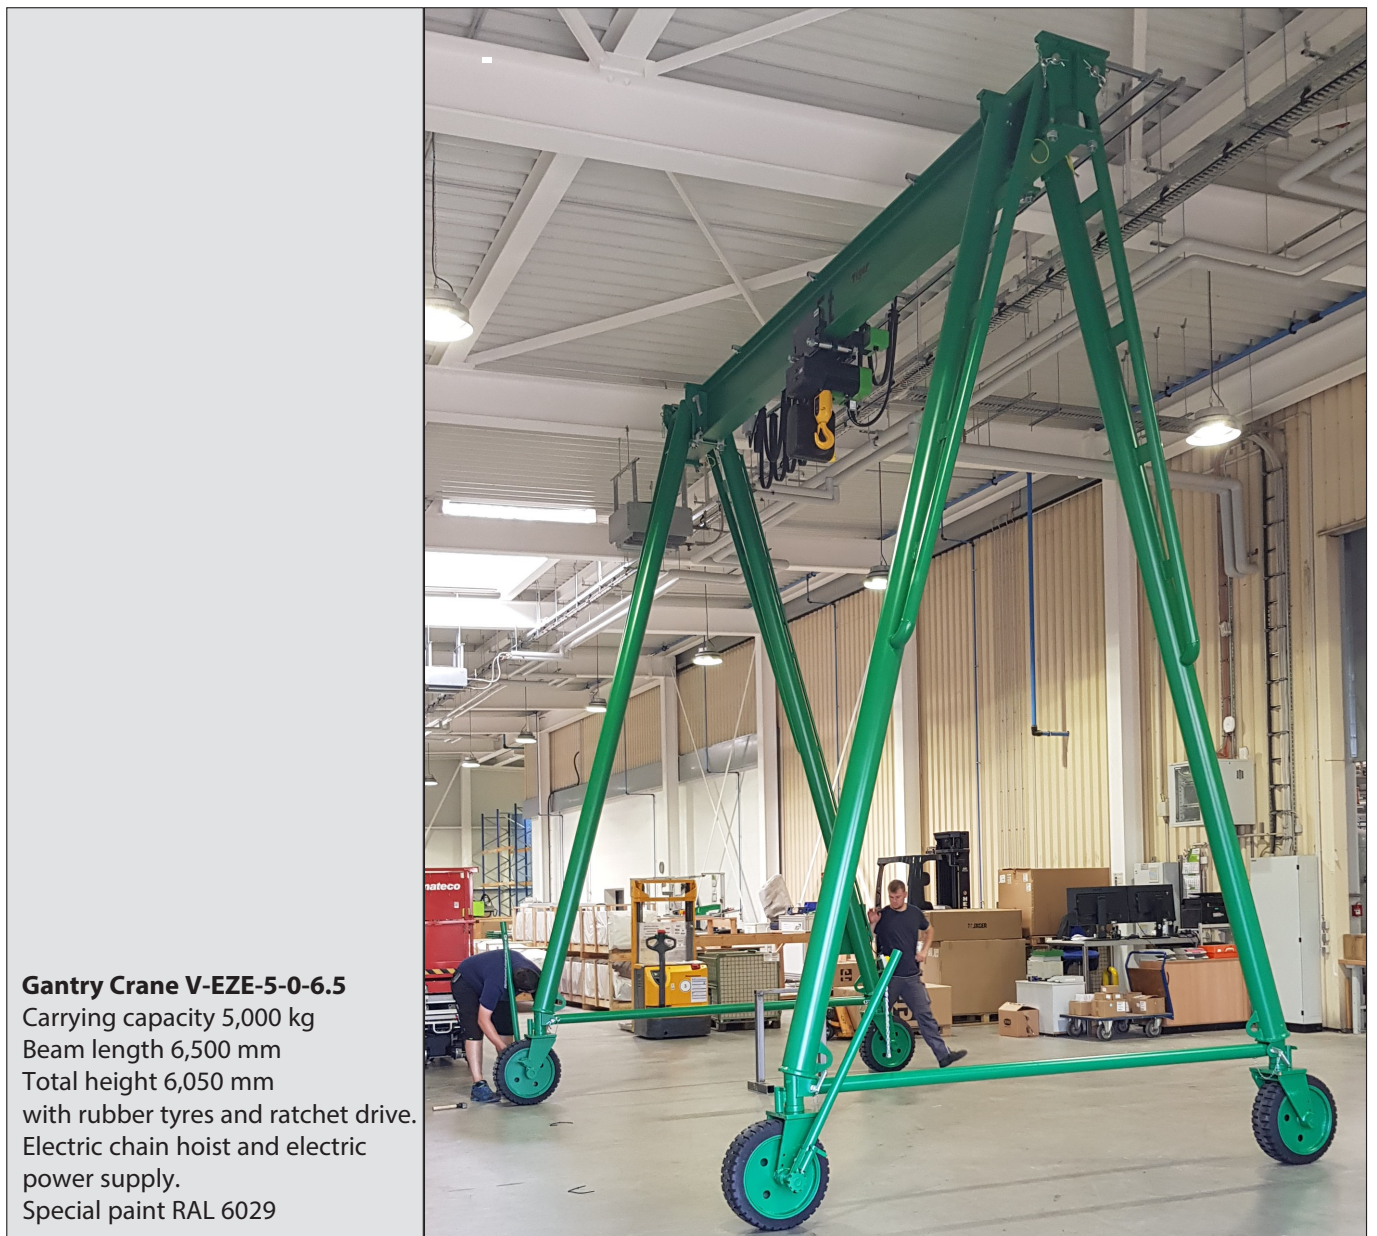

Gantry Crane V-EZE-5-0-6.5

Carrying capacity 5,000 kg
Beam length 6,500 mm
Total height 6,050 mm
with rubber tyres and ratchet drive.
Electric chain hoist and electric
power supply.
Special paint RAL 6029

- ❑ **Fast erection and dismantling via bolt connection**
- ❑ **Construction according to EN 13001 / EN 1090**

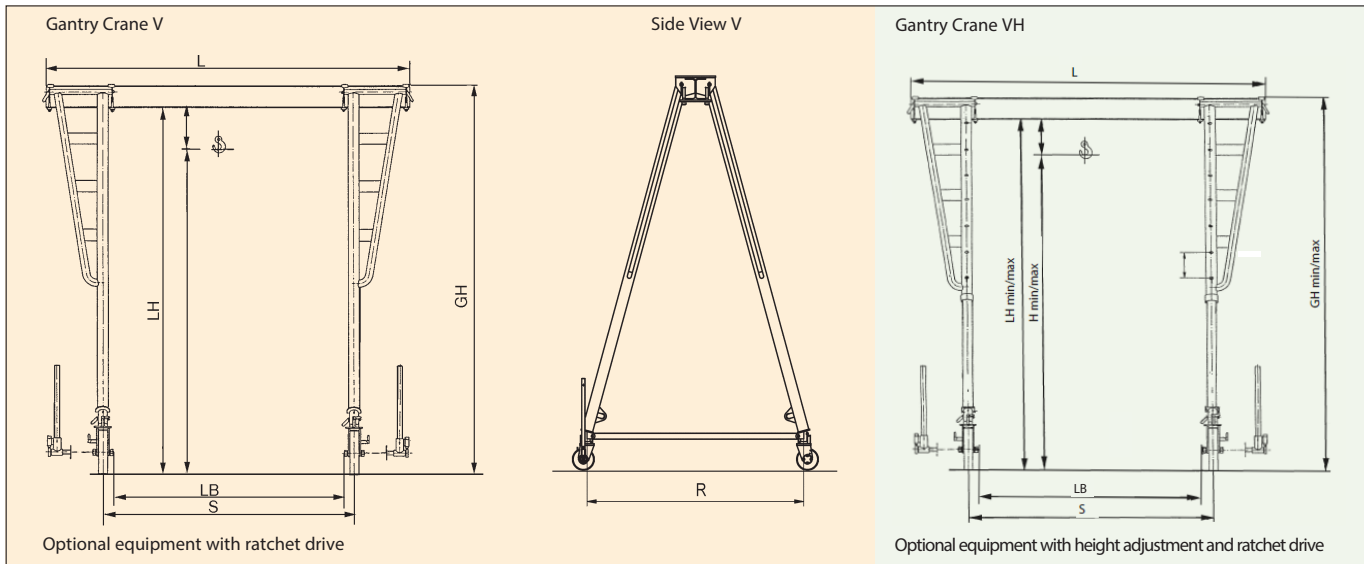

The Gantry Crane V is designed for indoor and outside use and can be equipped with any manual or electric hoist. The strong V-legs allow a high carrying capacity, a high span and a high construction height. The clamping connection between V-legs and beam enables a continuously adjustable span. The all bolt connection guarantees an easy and fast erection of the crane. Big steel wheels of a diameter of approx. 400 mm allow an easy run. For a simple moving of the crane on even and solid ground, the crane can be equipped with ratchet drive acting on 2 wheels. The wheels can be fixed at 90° intervals, two of them can be additionally locked. Coat of varnish: orange, RAL 2000.

The Gantry Crane **VH** can be adjusted in height via bolts.

Full assembly: crane with crane test book including a certified preliminary- and construction test, operating instructions, but without hoist.

All weight and measurement data are deemed to be approximate.

Order No.	Model	Carrying Capacity kg	Beam Length L mm	Beam Section PE	Span S mm	Clearance Height mm	Total Height mm	Wheel Base R mm	Weight kg	Order No.	Model	Max. Total Height mm	Min. Total Height mm
505 005	V-103	1,000	3,000	200	2,090	3,785	4,000	2,100	500	505 205	VH-103	4,000	2,718
505 010	V-104	1,000	4,000	200	3,090	3,785	4,000	2,100	530	505 210	VH-104	4,000	2,718
505 015	V-105	1,000	5,000	200	4,090	3,785	4,000	2,100	580	505 215	VH-105	4,000	2,718
505 020	V-106	1,000	6,000	220	5,090	3,765	4,000	2,100	650	505 220	VH-106	4,000	2,718
505 025	V-204	2,000	4,000	240	3,090	4,740	5,000	2,600	630	505 225	VH-204	5,000	3,228
505 030	V-205	2,000	5,000	270	4,090	4,710	5,000	2,600	700	505 230	VH-205	5,000	3,228
505 035	V-206	2,000	6,000	270	5,090	4,710	5,000	2,600	780	505 235	VH-206	5,000	3,228
505 040	V-207	2,000	7,000	300	6,090	4,680	5,000	2,600	900	505 240	VH-207	5,000	3,228
505 045	V-304	3,200	4,000	300	3,100	4,680	5,000	2,600	750	505 245	VH-304	5,000	3,233
505 050	V-305	3,200	5,000	300	4,100	4,680	5,000	2,600	850	505 250	VH-305	5,000	3,233
505 055	V-306	3,200	6,000	330	5,080	4,650	5,000	2,600	950	505 255	VH-306	5,000	3,233
505 060	V-307	3,200	7,000	360	6,080	4,620	5,000	2,600	1,100	505 260	VH-307	5,000	3,233
505 065	V-505	5,000	5,000	360	4,100	4,615	5,000	2,600	1,000	505 265	VH-505	5,000	3,268
505 070	V-506	5,000	6,000	400	5,090	4,575	5,000	2,600	1,100	505 270	VH-506	5,000	3,268
505 075	V-507	5,000	7,000	450	6,090	4,525	5,000	2,600	1,180	505 275	VH-507	5,000	3,268
505 080	V-508	5,000	8,000	450	7,090	4,525	5,000	2,600	1,300	505 280	VH-508	5,000	3,268

Accessories: manual/electric hoist, electric power supply via trailing cable.

Special designs on request: modified carrying capacity, height, width, rubber tyres, track wheels, ratchet drive ...

Wheels available:

- 1 - Steel as standard
- 2 - Steel for tracks
- 3 - Rubber tyres up to 3 t carrying capacity
- 4 - Rubber tyres with ratchet drive

