

530

ALUMINIUM GANTRY CRANE




- **Light weight aluminium construction**
- **Adjustable length of legs**

- **■** Continuously adjustable width
- **Erection aid on request**
- **Foldable construction, light transportation and easy assembly**

Subject to alteration I 08.2024 www.wimag.de

The perfect aluminium crane, with quick mounting and dismantling, it is ideal for operating across different sites.

Beam and legs of the crane are manufactured of high quality aluminium profiles. This makes the construction very light and can be easily carried by two people.



Due to link joints between beam and legs the crane is easily erected by one person: fold out the four legs, secu-re with bolts and adjust to the height required. In this case the erecting aid would prove to be useful, available as accessory.



As a standard delivery the distance between the legs can be continuously adjusted on both sides via two screw adjustments.

The length of the legs can be adjusted; a big advantage when


operating on uneven ground.


The crane is equipped with a ball bearing trolley LK, easily moveable by pushing the load.



On request, the trolley is also available with a locking device: trolley LF. The trolley can be fitted with a manual hoist.

When the crane is not needed, it is simply folded up and can be stored in the smallest of spaces.

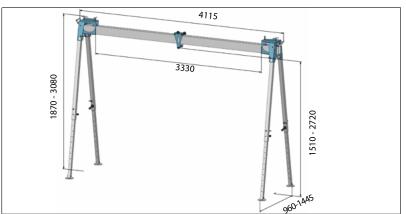



Bestell-Nr.	Тур	Safe Working	Gewicht
		Load	
530 075	Aluminium crane AK 750 with trolley LK 750	750 kg	85 kg
722 031	Manual chain hoist HZE 1,0, lifting height 3 m,	1,000 kg	12 kg
	construction height 330 mm		
048 672	Locking device for trolley LF 750	750 kg	8 kg
530 150	Aluminium crane AK 1500 with trolley LK 1500	1,500 kg	105 kg
722 041	Manual chain hoist HZE 2,0, lifting height 3 m,	2,000 kg	19 kg
	construction height 385 mm		
048 671	Locking device for trolley LF 1500	1,500 kg	9 kg
048 648	Hand-Geared Trolley (total height + 80 mm)	1,500 kg	10 kg
048 641	Erection aid (2 pieces)		3 kg
048 044	Spike Aluminium crane (Set=4 Pcs.)		2,5 kg

Subject to alteration I 08.2024 www.wimag.de