

TURBO M-LEVATOR

Turbo M-Levator with suction plate GG 50

- **The vacuum lifter also designed for very porous and rough material**
- **Operation with alternating current 230 V - 50 Hz**
- **For manual operation as well as for machine hoisting operation**

Turbo M-Levator: the perfect vacuum lifter, also designed for very porous materials like concrete plates, ...

Manual hoisting operation

The Turbo M-Levator has specifically been developed for the lifting of even very porous material such as natural or concrete plates. The surface can be smooth or rough.

The suction plate required can be easily and quickly mounted via two toggle clamps. The maximum carrying capacity is 200 kg.

The suction plate is sealed using a flexible rubber. The sealing is self-adhesive and can be easily replaced due to wear and tear.

The Turbo M-Levator immediately adheres to the plate after positioning. The vacuum lifter is equipped with a pressure gauge to control the vacuum.

The Turbo M-Levator first releases the plate when required: move lever. The power is provided through mains supply 230 V – 50 Hz.

The basic equipment can also be equipped with a **docking station**. For various plate sizes the manual suction devices are also available with a two-chamber system.





Machine hoisting operation


According to EN 13155 the Turbo M-Levator equipped with the **hoisting module** (suspension eye, safety chain, chain box, protection from unintentional operation) can also be used for machine hoisting operation close to the ground.

Where the Turbo M-Levator is equipped with the **hydraulic module** the plate can be rotated and released using the wheel loader.

Individual suction plates, for example, for edging stones or border stones are available.

Special designs for individual shapes are available on request.

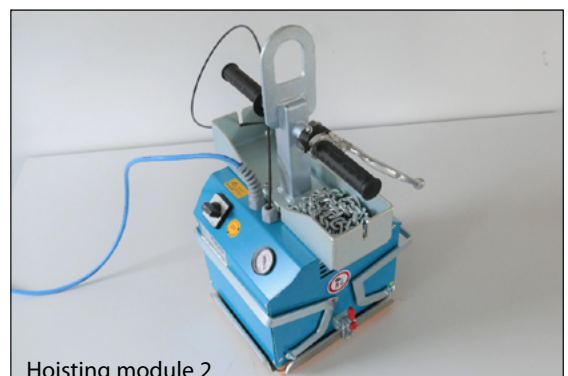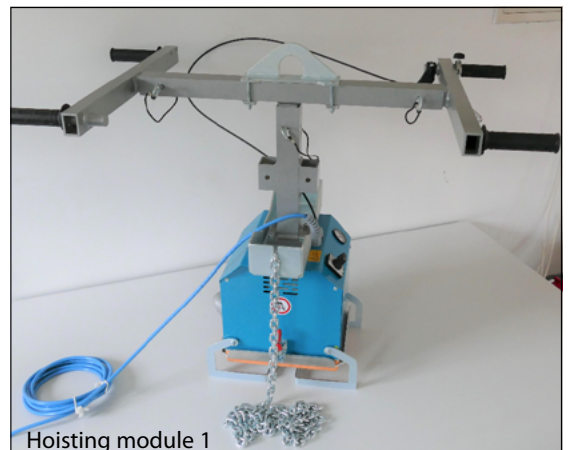


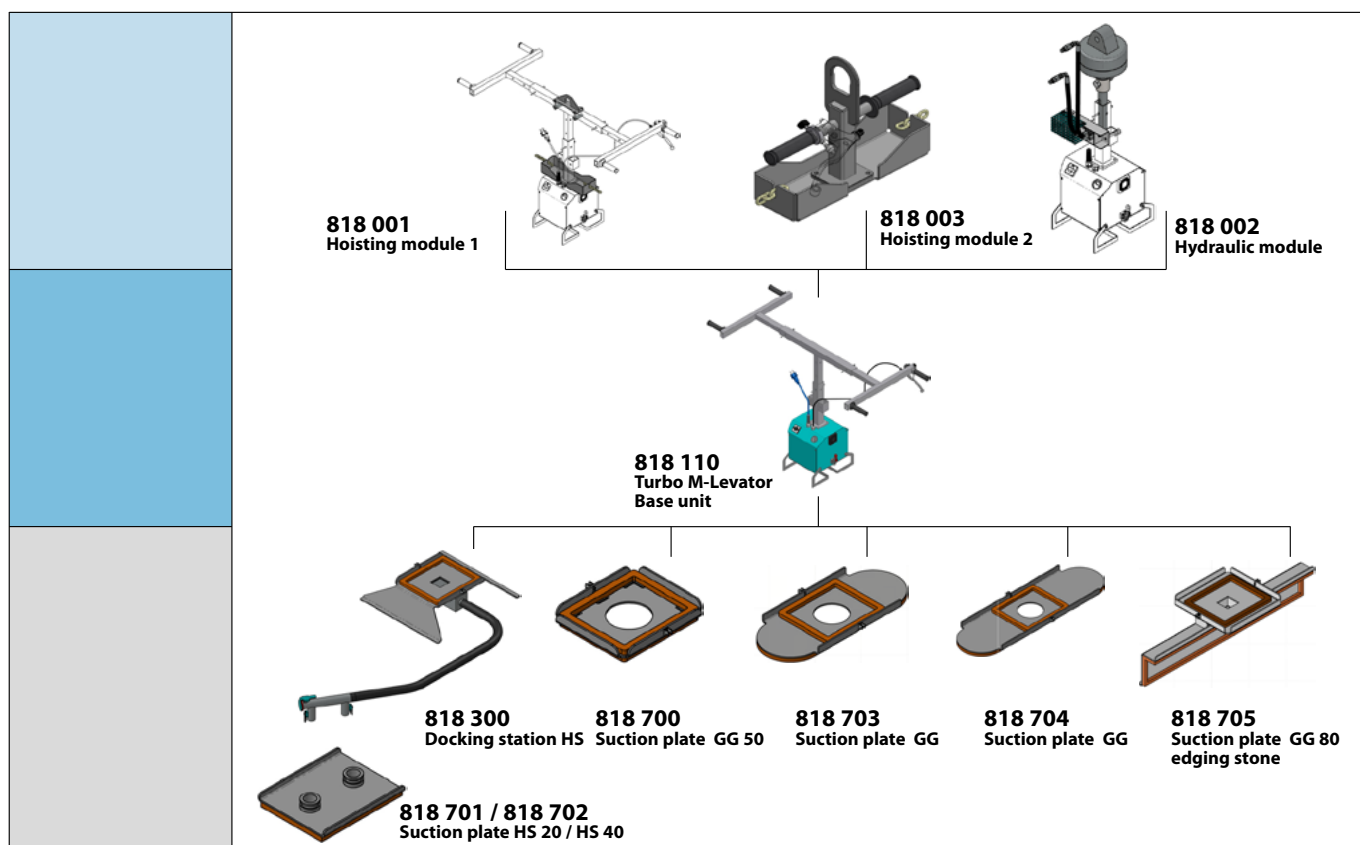

Order No.	Model	Dimensions mm	Carrying Capacity	Weight
818 000	Turbo M-Levator base unit with 5 m electric cable 230 V – 50 Hz			13 kg
818 001	Hoisting module 1 ** (Mounting on carrier system) (suspension eye, safety chain, chain box, protection from unintentional operation)			7,0 kg
818 003	Hoisting module 2 ** (Mounting on base unit) (suspension eye, safety chain, chain box, protection from unintentional operation)			7,0 kg
818 002	Hydraulic module for the hydraulic rotation and release of the load, consisting of rotator and hydraulic cylinder for connection to the hydraulic system of, for example, an excavator / wheel loader			4,0 kg
818 300	Docking station HS with 5 m hose and handle	447 x 502 mm		3,0 kg
818 701	Suction plate HS 20	150 x 260 mm	20 kg*	1,8 kg
818 702	Suction plate HS 40	220 x 300 mm	40 kg*	2,0 kg
818 302	Two-chamber system for HS 20, HS 40, add-on kit			
818 700	Suction plate GG 50	300 x 300 mm	50 kg*	1,4 kg
818 703	Suction plate GG 140	330 x 600 mm	140 kg*	2,2 kg
818 704	Suction plate GG 200	330 x 840 mm	200 kg*	3,3 kg
818 705	Suction plate GG 80 - edging stone	80 x 900 mm	80 kg*	5,0 kg
818 706	Suction plate GG 150 - high kerb stone		120 kg*	6,0 kg
818 708	Suction plate GG 200	520 x 530 mm	200 kg*	3,0 kg

* Maximum carrying capacity on a normal surface will work at a low pressure of –0.2 bar. If this low pressure is not reached, the carrying capacity will decrease.

** Operation close to the ground only. According to EN 13155 the equipment may only be used with the safety chains applied.

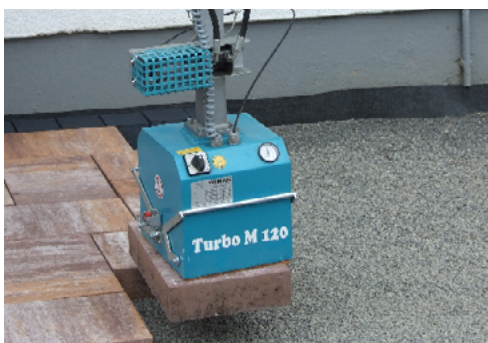

Operation with mini excavator equipped with generator on top of the cabin.
Turbo M-Levator with hydraulic module and rotator: hydraulic release and rotation by the operator of the excavator.

Turbo M-Levator with suction plate GG 80 – edging stone

