



- The strong and compact vacuum lifter for machine hoisting operation
- For even and rough surfaces
- For operation with electric motor 230 V – 50 Hz
- Maximum carrying capacity 2,000 kg

## Uni-Levator: the powerful vacuum lifter für machine hoisting operation

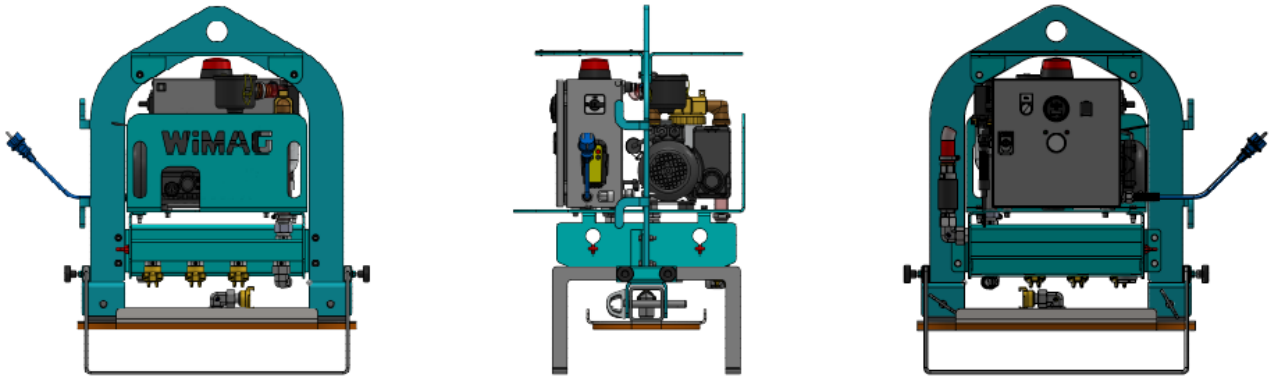

Almost all smooth/rough and even surfaces can be easily suctioned and safely transported with the Uni-Levator. The Uni-Levator only releases the plate again when you want it to: open the valve for this purpose.

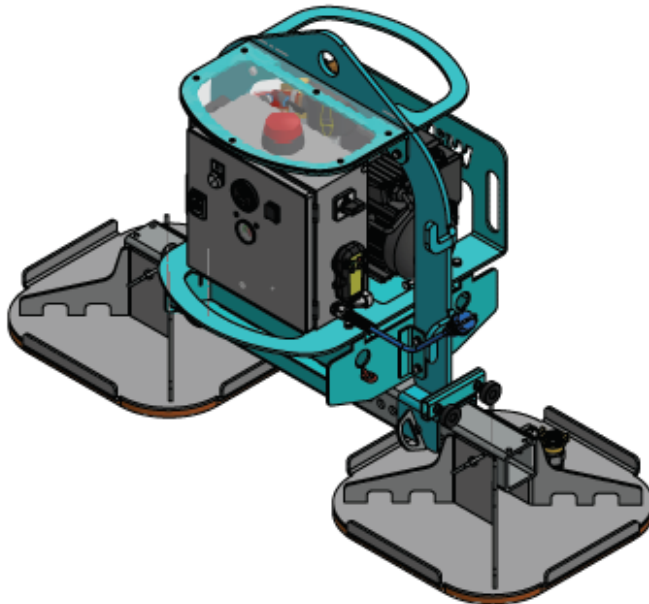

Uni-Levator with 2 suction plates SP 500 and beam

### Specification

The oil-lubricated vane-type vacuum rotary pump is designed for non-stop operation and is characterised by its extremely smooth running and performance.

The vacuum chamber of the suction plate is sealed with an elastic rubber. The sealing is self-adhesive and can be easily changed. To protect the sealing equipment can be placed on both resting feet.

The Uni-Levator is equipped as standard with a vacuum storage, a water trap, a pressure gauge, a warning device and a safety valve.

### Accessories

Remote control

Generator

Special suction plates on request

| Order No.      | Model   | Carrying Capacity kg* | Width x Length mm | Weight kg |
|----------------|---|-----------------------|-------------------|-----------|
| <b>841 100</b> | Uni-Levator with suction plate SP 400   | 400                   | 550 x 720         | 108       |
| <b>841 201</b> | 1 suction plate SP 500 with beam  | 500                   | 500 x 500         | 25        |
| <b>841 202</b> | 2 suction plates SP 500 with beam   | 1,000                 | 500 x 1,390       | 48        |
| <b>841 203</b> | 1 suction plate SP 1000 with beam   | 1,000                 | 650 x 650         | 36        |
| <b>841 204</b> | 2 suction plates SP 1000 with beam  | 2,000                 | 650 x 1,540       | 70        |
| <b>841 300</b> | Remote control  |                       |                   |           |
| <b>841 310</b> | Petrol powered electric generator inverter soundproofed 230 V-50 Hz with suspension |                       |                   |           |
| <b>841 402</b> | Safety chains according to EN 13155, length 3.0 m                                   |                       |                   | 3         |

\* Maximum carrying capacity at a low pressure of at least -0.65 bar. If the surface is very rough or very porous, the carrying capacity is reduced or will be zero. The vacuum lifter may only be used near to the ground.